




date/contact: 300712/CHA
 finishing: TKI
 last update: -
 drawing: 94005
 unit: - / mm
 tolerance: -
 page: 1/2

EVE GmbH
 Hollefeldstr. 16
 48282 Emsdetten
 Tel.: +49 (0) 25 72 / 93 51 - 0
 Fax: +49 (0) 25 72 / 93 51 - 24
 www.eve.de • info@eve.de

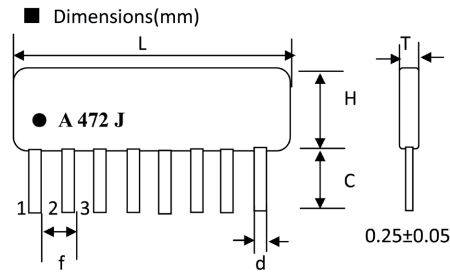

TYPE	L	H(MAX)	T	c	d	f
	(MAX)	A	(MAX)	±0.5	±0.05	±0.2
4pin	10.2					
5pin	12.7					
6pin	15.3					
7pin	17.8					
8pin	20.4					
9pin	22.9	5.08	2.5	3.5	0.5	2.54
10pin	25.4					(1.778)
11pin	28.0					
12pin	30.5					
13pin	33.1					
14pin	35.6					

■ Circuit construction

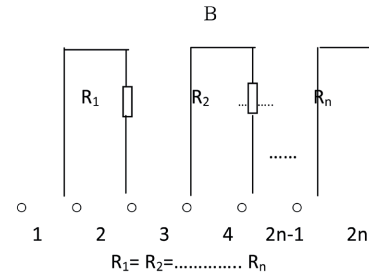

■ Rated Power

Rated Power	1/8W
Max.Operating Voltage	200V
Resistance tolerance	±2%
Resistance Range	E-24 Series (10Ω—1MΩ)
Operating Temperature Range	-55℃—+125℃
Temperature Coefficient	±250ppm/℃/±100ppm/℃
Rated Temperature	70℃

■ Features

Item	Specification	Test Methods (JISC 4202)
Temperature Cycling	± (1.0%R+0.05Ω)	-55℃—+125℃ for 5 Cycles
Short Time Over Load	± (2.0%R+0.1Ω)	Rated Voltage×2.5 for 5 Seconds
Resistance to Soldering Heat	± (1.0%R+0.05Ω)	260±5℃ for 10 Seconds
Moisture Loading Life	± (3.0%R+0.1Ω)	60℃±2℃ 90—95%RH 1000Hrs at RCWV1.5Hrs ON,0.5Hrs OFF
Loading Life	± (3.0%R+0.1Ω)	70℃±2℃ 1000Hrs at RCWV 1.5Hrs ON,0.5Hrs OFF
Solderability	Coverage≥95%	235±5℃ for 2seconds

■ Standard Resistance Value (Ω)

10	12	15	18	22	33	39	47	56	58	82
100	120	150	180	220	330	390	470	560	680	820
1 K	1.2 K	1.5 K	1.8 K	2.2 K	3.3 K	3.9 K	4.7 K	5.6 K	6.8 K	8.2 K
10 K	12 K	15 K	18 K	22 K	33 K	39 K	47 K	56 K	68 K	82 K
100K	120 K	150 K	180 K	220 K	330 K	390 K	470 K	560 K	680 K	820 K
1 M	1.2 M	1.5 M	1.8 M	2.2 M	3.3M					

■ Packaging Quantity

Bulk Package 200Pcs Per Plastic Bag