

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40 °C to +105 °C



Material

Insulator: Polyester, UL 94V-0
 ©Standard: P.B.T
 Contact Pin: Copper Alloy

ORDER INFORMATION

PH1D25-1 XX X X A/L1/B - L

©Standard Recommend

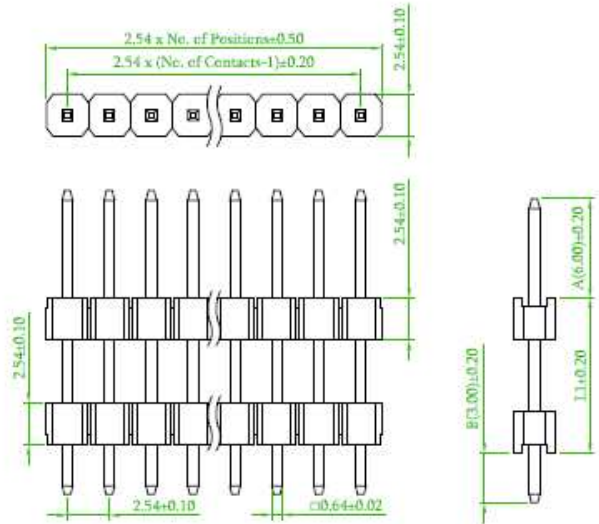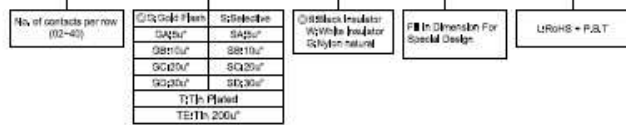

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

		品名 TITLE				PIN HEADER 2.54mm STACK STRAIGHT TYPE PLASTIC HEIGHT 2.5mm			
		品號 PART NO.		PH1D25-1XX-L		日期 DATE		2010/11/24	
		圖號 DRAWING NO.		PH1D25-1XX-L		版本 REV.		A	
		客戶品號 CUSTOMER P/N				比例 SCALE		FREE	
		公差 TOLERANCE		X ±0.35 .XX ±0.25		單位 UNIT		mm	
						繪圖 DRAWN			
						核對 CHECKED			
						核准 APPROVED			

AREA	REV.	DESCRIPTION	DATE