


	REVISED	DR	APP

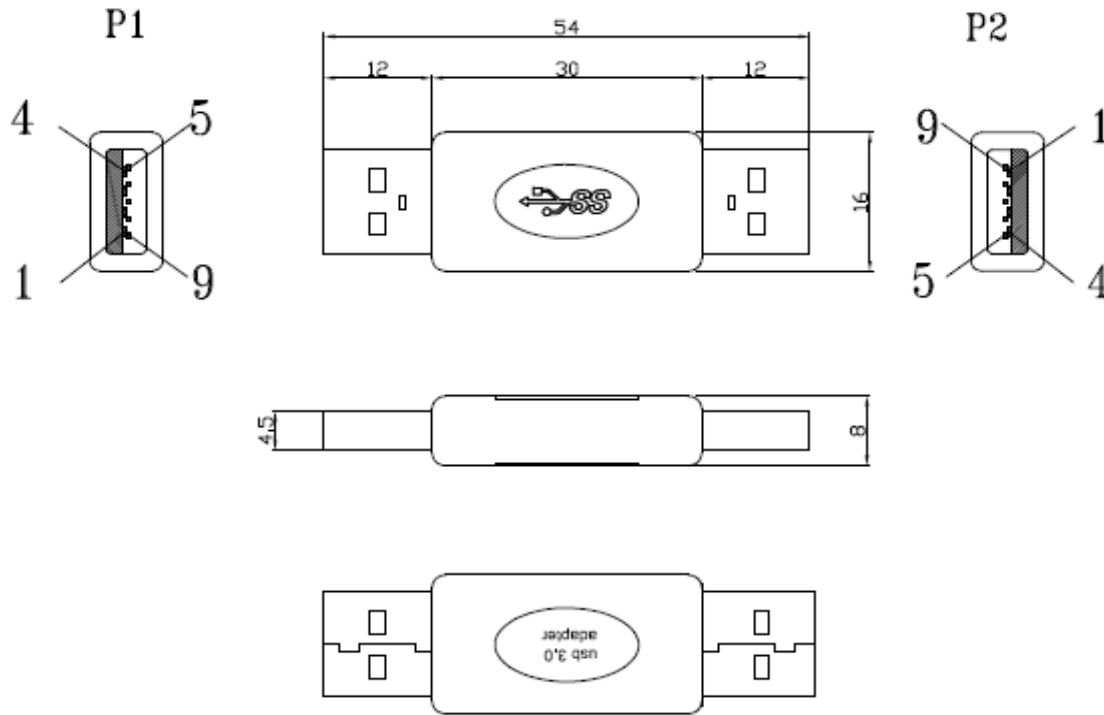

NOTES:

1. WIRE:  
28AWG WHITE PVC JACKET OD:  $0.8 \pm 0.2$ mm.
2. CONNECTOR:  
P1: USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE INSULATION, GOLD PLATED  $15 \mu$ "CONTACTS, SHELL NICKEL PLATED.  
P2: USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE INSULATION, GOLD PLATED  $15 \mu$ "CONTACTS, SHELL NICKEL PLATED.
3. HOOD: OVERMOLD USE (ANY) 45P PVC.
4. ALL MATERIALS ARE ROHS COMPLIANT.
5. TESTING: ALL PRODUCTS MUST BE 100% TESTED  
AT: COND:  $5 \Omega$  INS:  $10M \Omega$  HI-V: DC 300V  
0.01SEC
6. PACKING: EACH CABLE IN A CLEAR ZIP-BAG.

PIN OUT

P1		P2
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	8
6	—————	9
7	—————	7
8	—————	5
9	—————	6

SHELL ————— SHELL




**S/CONN**  
 maximum connectivity  
 S-Conn Handels GmbH  
 Am Mühlberg 8  
 91477 Markt Bibart  
 Tel. 09162/ 98 93 8-0  
 Fax 09162/ 98 93 8-20  
 info@s-conn.de  
 www.s-conn.de

DESCRIPTION		USB 3.0 AM to BM adapter, blue					
SIZE	A4	DATE	27.03.2012	CHECKED		TOL	77047-3
UNIT	MM	DRAWN	C.Motzek	APPROVED			
SCALE	NTS						